



# PRO-DRIVEN ENGINEERED DIFFERENCE

FOAM GUNS  
MULTIPLE DENSITIES  
DISPOSABLE  
HIGH-VOLUME TRAINING  
REFILLABLE

OPEN CELL  
PORTABLE  
INSULATE  
ADHESIVES  
SERVICE

HIGH-YIELD  
R-VALUE  
FIRE-RATED  
CLOSED CELL



HIGH PERFORMANCE 1 & 2-COMPONENT  
SPRAY FOAM SEALANTS

PRODUCT CATALOG

# 2-COMPONENT FOAM PRODUCTS



DAP Touch 'n Seal foam kits are 2-component low-pressure spray-applied or pour-in-place polyurethane foam systems for air sealing and insulating residential, commercial, industrial, agricultural structures. The components are mixed and applied with patented applicators to produce rapidly curing polyurethane foam insulation.

## Foam Kits



Rip 'n Go Handle



### Small Foam Kit

- Fast expansion & quick cure
- Supplies 10 lbs or up to 13,500 linear feet of foam
- Easily portable, fully disposable

### Medium Foam Kit

- Ideal for medium size projects such as sealing basement sill plates/band joists
- Blend of product yield & portability (single carton design with built in carrying case)
- Includes 10' hoses & 10 nozzles

### Large Foam Kit

- Ideal for large projects such as insulating attic rafters or stud wall cavities up to 2"
- Includes 15' hoses & 10 nozzles

## Refillables

- Returnable cylinders
- Best for OEM operations
- Low investment
- 1.75 PCF Refills in Standard, ICC & Slow Rise, available in 3 sizes: 17 gallon, 60 gallon & 120 gallon



[www.touch-n-seal.com](http://www.touch-n-seal.com)

Technical Support  
1-888-DAP-TIPS

## CPDS – Constant Pressure Dispensing System



Item # 7565000150



- Offers the convenience of Foam Kits with higher output & efficiency
- Application rate is adjustable and consistent
- Self-contained system does not require any additional equipment
- Disposable cylinders are easy to handle and change
- Ideal for mid-sized projects such as room additions, attics, rim joists, and crawl spaces



### Included in the system:

- 100' hose; foam applicator; on/off valves – fully assembled
- 2 replacement check valves
- Conical nozzles (25 pack)
- Fan nozzles (25 pack)
- Extra foam applicator with 12" hose
- Protective cover
- Forced air heating unit
- Extra pressure supply hoses (2)
- Wrenches – 9/16" & adjustable
- Operation manual & instructional video

### Affordable System for High Volume

Watch the  
CPDS in  
action!



## 1.75 PCF FR Standard - Closed Cell

Touch 'n Seal 2-Component 1.75 PCF FR Standard foam is a closed cell spray foam insulation that provides ASTM E-84 Class A fire resistance as well as thermal insulating and sound attenuating properties.



Product Description	Coverage* bd. ft.	Item #
Foam Kit 15	15	7565020015
Foam Kit 110	110	7565020110
Foam Kit 200	200	7565020200
Foam Kit 600	600	7565000056
Foam Kit 600 Replacement	600	7565020601
Refill RF-17	1980	7565051000
Refill RF-60	6840	7565060000
Refill RF-120	11,400	7565051200

Tech Data	
Density	1.75 pcf
R-Value per inch (Aged)** ASTM C518	5.5
Dry/Tack-Free	45 seconds
Cutttable	5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
Surface Burning Characteristics ASTM E84 Flame Spread / Smoke Developed	@ 2" thick (51mm): 25 / 50
Shelf Life (unopened container)	15 months

\* Theoretical Coverage/Yield  
 \*\* The higher the R-value the greater the insulating power.  
 Ask your seller for the fact sheet on R-values.

## 1.75 PCF FR ICC - Closed Cell

Touch 'n Seal 2-Component 1.75 PCF ICC foam is a closed cell spray foam insulation that provides ASTM E-84 Class A fire resistance and complies with ICC Evaluation Services listing ESR-3052.



Product Description	Coverage* bd. ft.	Item #
Foam Kit 200	200	7565001200
Foam Kit 600	200	7565021600
Foam Kit 600 Replacement	600	7565021601
Refill RF-17	1980	7565010000
Refill RF-60	6840	7565066000
Refill RF-120	11,400	7565013000

Tech Data	
Density	1.75 pcf
R-Value per inch (Aged)** ASTM C518	6.2
Dry/Tack-Free	45 seconds
Cutttable	5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
Surface Burning Characteristics ASTM E84 Flame Spread / Smoke Developed	@ 2" thick (51mm): 15 / 350
Shelf Life (unopened container)	15 months

\* Theoretical Coverage/Yield  
 \*\* The higher the R-value the greater the insulating power.  
 Ask your seller for the fact sheet on R-values.

## 1.75 PCF Slow Rise 120 - Closed Cell

Touch 'n Seal Slow Rise 120 is designed for pour-in-place applications where foam needs to completely fill cavities or spaces without creating voids or excessive pressure. Slow Rise 120 is an ASTM E84 Class A rated foam and meets the U.S. Coast Guard requirements for flotation material (33 CFR 183.144).



Product Description	Coverage* bd. ft.	Item #
Foam Kit 200	200	7565022120
Foam Kit 600	600	7565026120
CP-750	750	7565007520
Refill RF-17	1,980	7565020120
Refill RF-60	6,840	7565061120
Refill RF-120	11,400	7565014120

\* Theoretical Coverage/Yield  
 \*\* The higher the R-value the greater the insulating power.  
 Ask your seller for the fact sheet on R-values.

Tech Data	
Density	1.75 pcf
R-Value per inch (Aged)** ASTM C518	5.2
Dry/Tack-Free	75 seconds
Cuttable	10 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
Surface Burning Characteristics ASTM E84 Flame Spread / Smoke Developed	@ 2" thick (51mm): 20 / 350
Shelf Life (unopened container)	15 months

## 1.0 PCF FR Standard - Open Cell

Touch 'n Seal Low Density 1.0 PCF Spray Foam is an open-cell, non-structural air sealing and insulating foam. The lower the density, more expansion will occur. 1.0 PCF SPF will expand approximately 10 – 12 times the dispensed froth.



Product Description	Case Qty	Item #
Foam Kit 300	1	7565020300
Foam Kit 1000	1	7565021000

\*\* The higher the R-value the greater the insulating power.  
 Ask your seller for the fact sheet on R-values.

Tech Data	
Density	1.0 pcf
R-Value per inch (Aged)** ASTM C518	4.1
Dry/Tack-Free	45 seconds
Cuttable	5 minutes
Cure Time	Approx. 1 hr
Closed Cell	No
Surface Burning Characteristics ASTM E84 Flame Spread/Smoke Developed	@ 2" thick (51mm): 25 / 350
Shelf Life (unopened container)	12 months



**1-COMPONENT  
FOAM PRODUCTS**

# SEALANTS

DAP Touch 'n Seal one-component polyurethane foam sealants are the most effective way to seal gaps and voids and prevent energy loss from air infiltration. Patented aerosol valves deliver greater control and less waste. Each product has been designed to meet the requirements of the most demanding air-sealing applications.



Item #	Description	Case Qty
7565000044	All Seasons 24 oz.	12

## All Seasons Low Temperature Applications

- Suitable for use at temperatures as low as 20°F
- Type V residential fire block
- Low curing pressure – can be used to seal windows & doors
- ICC-ES ESR-1926
- Meets AAMA 812-04
- Class A fire resistance

Tech Data	
Density	1.9 +/- .10 pcf
R-Value	4.5
Tack-Free	10 minutes
Cutttable	5 minutes
Cure	1 hour
Closed Cell	Yes
ASTM E84	Flame Spread 10 Smoke Developed 15
Yield (1/4" bead)	2,230 linear ft.
Shelf Life	1 year unopened



Item #	Description	Case Qty
7565029712	No-Warp 20 oz.	12

## No-Warp Window & Door Air Sealing & Fire Block

- Low expansion and pressure during cure for sealing windows & doors
- Meets AAMA 812-04
- ICC-ES ESR-1926 approved
- Class A fire resistance

Tech Data	
Density	1.3 – 1.8 pcf
R-Value	4.5
Tack-Free	12 minutes
Cutttable	30 minutes
Cure	1 hour
Closed Cell	Yes
ASTM E84	Flame Spread 10 Smoke Developed 15
Yield at 1/4" bead size	2,200 Linear feet
Shelf Life	1 year unopened





Item #	Description	Case Qty
7565000121	Gun Foam II 24 oz.	12

## Gun Foam II Air Sealing & Fire Block

- Type V residential fire block sealant
- Distinctive orange color
- ICC-ES ESR-1926
- Class A fire resistance

### Tech Data

Density	1.3 – 1.8 pcf
R-Value	7.12
Tack-Free	10 minutes
Cuttable	5 minutes
Cure	1 hour
Closed Cell	Yes
ASTM E84	Flame Spread 15 Smoke Developed 25
Yield (1/4" bead)	3,200 linear ft.
Shelf Life	1 year unopened



## Quick Cure Straw & Canister Foam

- Aerosol with reusable applicator straw & adapter included
- Cylinder available with 10 ft hose & applicator
- Residential fire block sealant
- ICC-ES ESR-1926 approved
- Class A fire resistance

### Tech Data

Density	1.75 +/- .25 pcf
R-Value	4.9
Tack-Free	Aerosol: <30 minutes; Cylinder: 15 minutes
Cuttable	1 hour
Cure	24 hours
Closed Cell	Yes
ASTM E84	Aerosol: Flame Spread 10 Smoke Developed 15 Cylinder: Flame Spread 20 Smoke Developed 25
Shelf Life	1 year unopened

Item #	Description	Case Qty
7565000057	QC HY Straw Foam, 12 oz.	12
7565000058	QC HY Straw Foam, 24 oz.	12
7565000062	QC HY Cylinder, 10 lb.	1
7565000064	QC HY Cylinder, 16 lb.	1

Item #	Description	Case Qty
7565000063	QC RX Cylinder, 10 lb.	1
7565000065	QC RX Cylinder, 16 lb.	1

# ADHESIVES

DAP Touch 'n Seal offers adhesives for indoor & outdoor applications. Heavy Duty Construction Adhesive is an all-weather, 1-component, ready-to-use foam that quickly condenses into a high-strength gel adhesive for use on drywall, plywood, OSB, pressure-treated lumber, joists, concrete, steel, plastic and painted surfaces. Black Foam is a UV-resistant gun foam specially formulated to blend in with landscaping, RV, automotive, HVAC & other applications.



Item #	Description	Case Qty
7565060320	Heavy Duty 24 oz.	12

## Heavy Duty Gel Foam Adhesive

### Indoor

- Use fewer fasteners & helps prevent against nail pops
- Bridges minor gaps on irregular surfaces
- Adheres to most common building materials
- Prevents drywall ceilings from sagging
- Conforms to ASTM C557 and D6464 – standard for drywall adhesion to wooden studs
- Independent, 3rd party verification from PFS

Tech Data	
Open Time	20 minutes
Fully Cured	4 hours
ASTM C557	Meets requirements
ASTM D6464	Meets requirements
Yield at 1/2" bead size	480 Linear feet



Item #	Description	Case Qty
7565029813	Black Foam 24 oz.	12

## Black Foam Polyurethane Foam Sealant and Adhesive

### Outdoor

- Use to bond stones for landscaping and waterfall/pond applications
- Formulated to resist discoloration in exterior applications

### Indoor

- Air Sealing for RV/automotive applications
- Black color blends in with black piping and auto undercarriages

Tech Data	
Density	1.3 – 1.8 pcf
R-Value	5
Tack-Free	10 minutes
Cuttable	30 minutes
Cure	1 hour
Closed Cell	Yes
ASTM E84	Flame Spread 15 Smoke Developed 25
Yield at 1/4" bead size	3,200 Linear feet
Shelf Life	1 year unopened

# ROOF TILE ADHESIVES



## Storm Bond® Roof Tile Adhesive



Item #	Description	Case Qty
7565029470	Storm Bond 24 oz. Can	12
7565017170	Storm Bond 23 lb. Cylinder	1

- Aerosol can & cylinder are easy to carry
- Great for spot repairs on roof
- Makes cut tile at valleys easier to install
- No ozone depleting chemicals
- Miami-Dade County & Florida Building Code approved



Tech Data	
Florida Certificate	FL14506
Walk on Time	2 hrs.
Full Cure Time	24 hrs.
TAS 101-95 Static Uplift Resistance	Pass
ASTM D-Compressive Strength Parallel to Rise	49.2 lb/in <sup>2</sup> (3.46 kg/cm <sup>2</sup> )
ASTM D-Compressive Strength Perpendicular to Rise	41.68 lb/in <sup>2</sup> (2.93 kg/cm <sup>2</sup> )
ASTM D - 1623 Tensile Strength	72.18 lb/in <sup>2</sup> (3.46 kg/cm <sup>2</sup> )
ASTM D-2126 Thermal & Humid Aging (-40°F, 14 days / 158°F, 100% Relative Humidity, 14 days)	0.1% 6.0%
Shelf Life	12 months

## Storm Bond® 2 Roof Tile Adhesive



Storm Bond 2 is a fast-curing, ultra-strong, two-component adhesive that virtually eliminates the need for nail and screw penetrations in the roof.

- Superior bonding strength
- May be walked on within minutes
- Reduces tile breakage during installation
- Miami-Dade County and Florida Building Code approved



Tech Data	
Florida Certificate	FL21374
Walk on Time	Several min.
Full Cure Time	24 hrs.
TAS 101-95 Static Uplift Resistance	Pass
ASTM D-Compressive Strength Parallel to Rise	20.3 lb/in <sup>2</sup> (140 kPa)
ASTM D-Compressive Strength Perpendicular to Rise	13.9 lb/in <sup>2</sup> (96 kPa)
ASTM D - 1623 Tensile Strength	30.0 lb/in <sup>2</sup> (207 kPa)
ASTM D-2126 Thermal & Humid Aging (-40°F, 14 days / 158°F, 100% Relative Humidity, 14 days)	0.35% 4.7%
Shelf Life	12 months

### Refillable Cylinders

Item #	Description
7565070300	Storm Bond 2 Refill 17 Gallon Part-A
7565070400	Storm Bond 2 Refill 17 Gallon Part-B
7565070500	Storm Bond 2 Refill 60 Gallon Part-A
7565070600	Storm Bond 2 Refill 60 Gallon Part-B

### Disposable Kits

Item #	Description
7565071200	Storm Bond 2 SB200 Kit
7565017000	Storm Bond 2 SB600 Complete Kit

# ELASTOMERIC SEALANT

Energy codes continue to require greater energy efficiency & lower air exchange. Homeowners increasingly expect higher performance & lower costs. DAP AirStop is designed to be an easy-to-apply sealant for areas of potential air leaks in the building envelope.



## Water-based Air Sealant

- Helps achieve the air leakage requirements of the International Energy Conservation Code (IECC)
- Bridges and penetrates gaps for a tight air seal
- Remains flexible after curing for a lasting seal
- Material contains no solvents
- Easy clean-up with water
- Ready-to-use formula requires no mixing
- Available in 27 lb. pail and 20 fl. oz. sausage pack

## Airless Sprayer Application



Sheathing Seam Seal



Stud Face to Drywall Gasket



Base Plate to Subfloor Seal

## Sausage Gun Application



AirStop can be bulk-loaded into a sausage gun for manual application.



Sausage gun is an easy alternative to using an airless sprayer.


### Tech Data

Tack Free	4 hours
Cure	18 hours
Gap Penetration	≥ 1/8 inch
Gap Bridging	≤ 3/8 inch
VOC Content	1.2 g/L
Shelf Life	18 months unopened
ASTM E84	Flame Spread 25 Smoke Developed 50
Application Temp	20° – 120°F

Item #	Description	Case Qty
7565050005	Air Stop 27 lb. Pail	1
7565051005	Air Stop 20 fl. oz. Sausage	12

# ACCESSORIES

DAP Touch 'n Seal offers a variety hoses, nozzles and kits that work with the innovative Applicator Gun to keep your operation running smoothly & efficiently. For cold weather usage, we also offer a full line of heating accessories to help maintain proper chemical temperature.

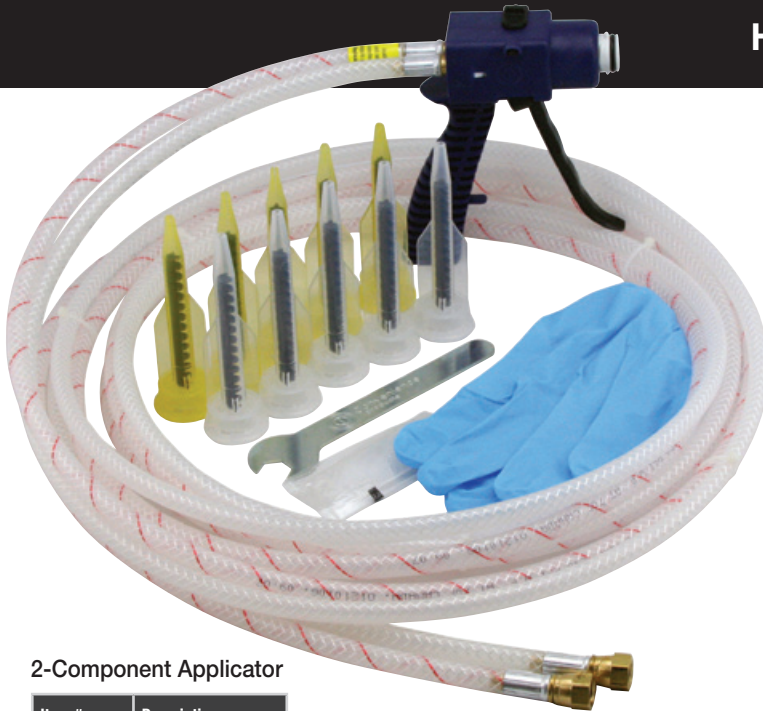

2-Component Applicator

Item #	Description
7565090327	15 ft. Hose Applicator
7565090337	30 ft. Hose Applicator

## Hose Set & Nozzles



Nozzle	Conical Nozzle	Fan Nozzle	Slow Rise Nozzle	System 15 Nozzle
Item #	7565029930	7565029940	7565029968	7565090691
Case Qty	25	25	25	30

## Poly-Clean

Polyurethane Foam Cleaner

- Cleans wet foam from tools and applicators
- Attaches directly to applicator basket to flush barrel
- Nozzle allows spray directly from can
- Item #7565012000



## Sharpshooter-X

One-Component Gun Foam Applicator

- Adjustable output for precise control of bead size
- Coated non-stick basket
- Item #7565010608



## Sharpshooter-D

One-Component Gun Foam Applicator

- Adjustable output for precise control of bead size
- Economical, disposable
- 6-Pack Item #7565000172



## Long Barrel Applicators

One-Component Gun Foam Applicator

- Adjustable output for precise control of bead size
- Coated non-stick basket
- 28" Item #7565010028
- 46" Item #7565010639



# SPECIALTY INDUSTRIES

DAP Touch 'n Seal offers products for a variety of specialty markets. From slow-rise polyurethane spray foam for the marine industry to roof tile adhesive for the roofing industry. For more information on these applications, please contact customer service.

## Mining



DAP Touch 'n Seal offers polyurethane foam systems for the mining industry. These mining products meet or exceed all MSHA-listed standards and are known in the industry for their ease of use and cost saving benefits.

## Transportation



DAP Touch 'n Seal foam systems offer versatility for repair of refrigerated trailers. Systems are available in sizes ranging from small disposable units to 120-gallon refillables. Liner Bond Trailer Adhesive attaches fiberglass liners to prepared spray foam insulation & aluminum posts.

## OEM



DAP Touch 'n Seal Refillable Foam Systems are ideally suited for large volume OEM applications. Refillable Systems are easier to set-up and maintain than foam rigs and require very little investment due to the returnable cylinders.

## Marine



DAP Touch 'n Seal Slow Rise 120 is designed for pour-in-place applications where foam needs to completely fill cavities or spaces without creating voids or excessive pressure. Slow Rise 120 is an ASTM E84 Class A rated foam and meets the US Coast Guard requirements for flotation material (33 CFR § 183.144).

## Roofing



DAP Touch 'n Seal roof tile adhesives attach concrete and clay roof tiles to approved underlayments. Both are approved for Florida Building Code and Miami-Dade County. Touch 'n Seal 3.0 PCF is a high compressive strength foam for use in new installations and for repairs or renovations of existing spray foam roofs.

## HVAC



DAP Touch 'n Seal spray foam kits can be used to quickly insulate duct work and offers excellent time and labor savings when compared to installing fiberglass insulation and tapes.

[www.touch-n-seal.com](http://www.touch-n-seal.com)

Technical Support  
1-888-DAP-TIPS

# ***It's About You, Our Customers.***

For order inquiries, please call our Customer Service Department at:  
**1-800-325-6180, then press "2"**

For technical questions, please call our DAP Tech Support at: **1-888-DAP-TIPS**

**[www.touch-n-seal.com](http://www.touch-n-seal.com)** contains a lot of helpful information about our products  
and how to use them, so be sure to check it out.



***Touch-n-Seal.com***

Item #	Description	Case Qty	Pallet Qty
<b>ONE-COMPONENT SEALANTS</b>			
7565000044	All Seasons, 24 oz.	12	72
7565000121	Gun Foam II, 24 oz.	12	72
7565029712	No-Warp Foam, 20 oz.	12	72
7565029813	Black Foam, 24 oz.	12	72
7565029470	Storm Bond Foam, 24 oz.	12	72
7565017170	Storm Bond Cylinder, 23 lb	1	50
7565000057	Quick Cure HY Straw Foam, 12 oz.	12	108
7565000058	Quick Cure HY Straw Foam, 24 oz.	12	72
7565000062	Quick Cure HY Cylinder, 10 lb	1	90
7565000064	Quick Cure HY Cylinder, 16 lb	1	50
7565000063	Quick Cure RX Cylinder, 10 lb	1	90
7565000065	Quick Cure RX Cylinder, 16 lb	1	50
7565050005	AirStop, 27 lb. pail	1	36
7565051005	AirStop, 20 fl. oz. sausage	12	48
<b>ONE-COMPONENT APPLICATORS AND ACCESSORIES</b>			
7565000172	Sharpshooter-D Applicator, Six Pack	6	-
7565010608	Sharpshooter-X Applicator	1	-
7565010629	One Component Bottom Load Applicator	1	-
7565010028	28" Long Barrel Applicator	1	-
7565010639	46" Long Barrel Applicator	1	-
7565029952	Brass Tip Extension	1	-
7565093315	10 ft. Wand Applicator, Hose (Cylinder)	1	-
7565012000	Poly-Clean Foam Cleaner, 12 oz.	12	108
<b>ONE-COMPONENT ADHESIVES</b>			
7565060320	Heavy Duty, 24 oz.	1	6
<b>TWO-COMPONENT FOAM KITS</b>			
7565020015	Foam Kit 15 FR Standard 1.75 PCF	12	24
7565020110	Foam Kit 110 FR Standard 1.75 PCF	1	36
7565020200	Foam Kit 200 FR Standard 1.75 PCF	1	36
7565000056	Foam Kit 600 FR Standard 1.75 PCF	1	32
7565001200	Foam Kit 200 FR ICC 1.75 PCF	1	36
7565021600	Foam Kit 600 FR ICC 1.75 PCF	1	32
7565021601	Foam Kit 600 FR ICC 1.75 PCF, Replacement	1	32
7565022120	Foam Kit 200 Slow Rise 120 1.75 PCF	1	36
7565026120	Foam Kit 600 Slow Rise 120 1.75 PCF	1	32
7565020300	Foam Kit 300 FR Standard 1.0 PCF	1	36
7565021000	Foam Kit 1000 FR Standard 1.0 PCF	1	32

Item #	Description	Case Qty	Pallet Qty
<b>TWO-COMPONENT FOAM KITS</b>			
7565071200	Storm Bond 2 - 200 Kit	1	36
7565017000	Storm Bond 2 - 600 Kit	1	16
<b>TWO-COMPONENT CPDS FOAM KITS</b>			
7565000750	CP-750 FR ICC 1.75 PCF	1	18
7565007520	CP-750 Slow Rise 120 1.75 PCF	1	18
7565050120	CP-1200 FR Standard 1.0 PCF	1	18
<b>TWO-COMPONENT REFILL FOAM KITS</b>			
7565051000	RF-17 FR Standard 1.75 PCF	1	1
7565060000	RF-60 FR Standard 1.75 PCF	1	1
7565051200	RF-120 FR Standard 1.75 PCF	1	1
7565010000	RF-17 FR ICC 1.75 PCF	1	1
7565066000	RF-60 FR ICC 1.75 PCF	1	1
7565013000	RF-120 FR ICC 1.75 PCF	1	1
7565020120	RF-17 Slow Rise 120 1.75 PCF	1	1
7565061120	RF-60 Slow Rise 120 1.75 PCF	1	1
7565014120	RF-120 Slow Rise 120 1.75 PCF	1	1
<b>TWO-COMPONENT APPLICATORS AND ACCESSORIES</b>			
7565000150	CPDS Series 2	1	-
7565000012	Applicator Kit, 12" hose-out (Refill / CPDS)	1	-
7565000045	30 ft. Hose Set (Refill / CPDS)	1	-
7565001100	100 ft. Hose Set (Refill / CPDS)	1	-
7565000170	Inline Filter Assembly	1	-
7565000035	60 ft. Hose Assembly with WHITE Applicator (Refill)	1	-
7565090327	15 ft. YELLOW Applicator w/Std Accessory Pack	1	-
7565090337	30 ft. YELLOW Applicator w/Std Accessory Pack	1	-
7565029930	Nozzle Pack, Clear – Conical	25	-
7565029940	Nozzle Pack, Yellow – Fan	25	-
7565029968	Nozzle Pack, Black – Injection	25	-
7565090691	Nozzle Pack, Calibration (Refill)	25	-

